


Rollin™

UV-E

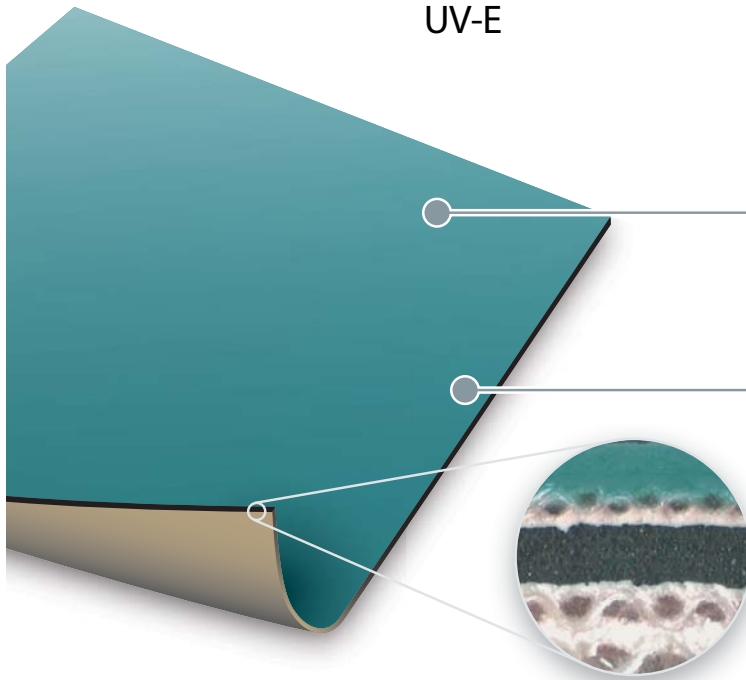

Applications:

Sheetfed, Coating, Packaging, Metal Decorating, Continuous Form & Plastic

UV Compatible Surface

Exclusively designed for UV applications, the EPDM blended rubber surface provides exceptional resistance to UV inks and washes.

Excellent Ink Transfer

The micro-buffed surface allows for superior print quality and release.

Durable Construction

Multi-ply fabric carcass is combined with the compressible layer for excellent smash resistance.

Technical Details

COLOR:	Green	INK COMPATIBILITY:	UV, EB
SURFACE:	Buffed EPDM Rubber	HARDNESS:	78 Shore A
AVAILABLE THICKNESS:	1.71 mm ± 0.02 (3 Ply) 1.96 mm ± 0.02 (4 Ply)	BLANKET CONSTRUCTION:	Compressible

For more information please contact BFS Pressroom Solutions

t: 0118 930 5999 f: 0118 932 3335

sales@bfs-pressroomsolutions.co.uk / www.bfs-pressroomsolutions.co.uk / 5 Pincents Kiln Industrial Estate / Pincents Lane / Calcot / Berkshire / RG31 7SD

Leading the way in Specialist Printing Consumables