


Rollin™

Libix

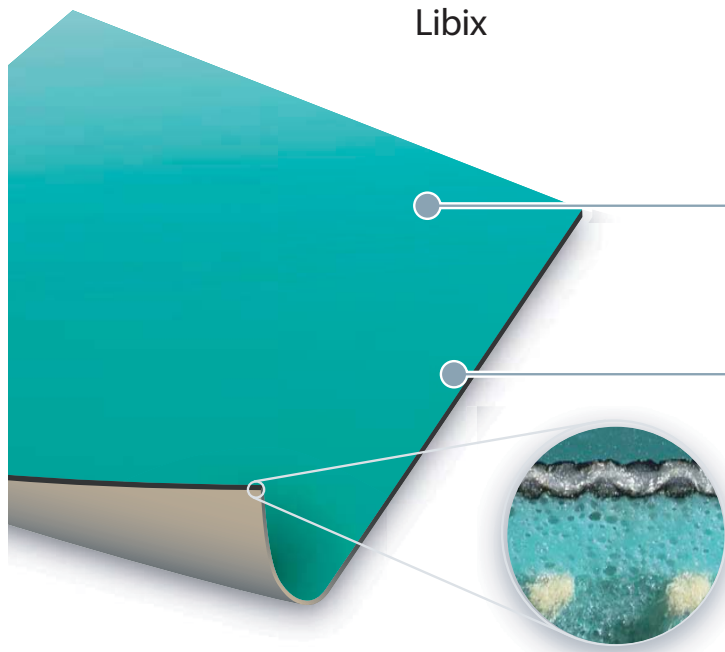

Applications:

Sheetfed, Cardboard Printing, Good success in large format sheetfed.

Low Solvent Top Surface

Top Surface chemically formulated to prevent solvent aggression.

High resistance

High resistant top rubber surface with exceptional wear, release and ink transfer properties.

Durable Construction

Robust polymer compressible layer engineered to provide exceptional smash absorption and recovery properties. Aramid fibres are used to ensure stability in the register on large format presses.

Technical Details

COLOR:	Dark Green	INK COMPATIBILITY:	UV, Conventional
SURFACE:	Micro-ground and polished	HARDNESS:	83 Shore A
AVAILABLE THICKNESS:	1.96 mm ± 0.02 (4 Ply)	BLANKET CONSTRUCTION:	Compressible
ROUGHNESS:	< 1.8 µm		

For more information please contact BFS Pressroom Solutions

t: 0118 930 5999 f: 0118 932 3335

sales@bfs-pressroomsolutions.co.uk / www.bfs-pressroomsolutions.co.uk / 5 Pincents Kiln Industrial Estate / Pincents Lane / Calcot / Berkshire / RG31 7SD

Leading the way in Specialist Printing Consumables