


Rollin™

Type 100 Series

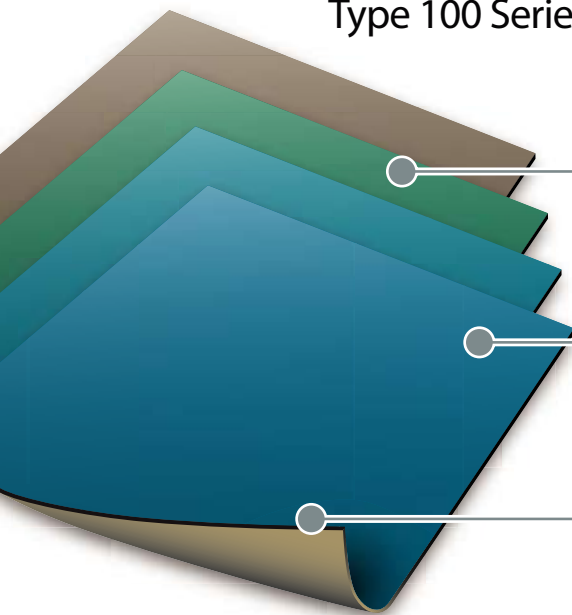

Applications:

Continuous Form and Envelope

Unmatched Quality

Long life and trouble-free performance regardless of the age, condition or speed of the form press.

Consistent Performer

Consistent throw length, uniform nip pressure, easy washup.

Easy Installation and Removal

Our proprietary adhesive is the best in the industry, allows for limited creeping and lifting, yet easy to remove.

Technical Details

	Type 100	Type 120	Type 150	Type 175
COLOR:	Gray	Green	Light Blue	Blue
INK:	Conventional, MICR	Conventional (Carbonless)	UV	Conventional, UV, MICR
BLANKET CONSTRUCTION:	Compressible, adhesive backed	Reinforced compressible, adhesive backed	Compressible, adhesive backed	Reinforced compressible, adhesive backed
SURFACE :	Buffed or Cast	Buffed	Buffed	Buffed
HARDNESS :	77 Shore A	80 Shore A	79 Shore A	79 Shore A
AVAILABLE THICKNESS :	Buffed surface: Type 100 T: 0.86 mm Type 100 M: 0.90 mm Type 100 MRE: 0.90 mm Type 100 S: 0.94 mm Type 100 SRE: 0.94 mm Type 100 D: 0.98 mm Cast surface: Type 100 R: 0.98 mm Type 100 RT: 1.02 mm Type 100 RTA: 1.06 mm Thickness tolerance: ± 0.02 mm	Type 120 M: 0.90 mm Type 120 S: 0.94 mm Thickness tolerance: ± 0.02 mm	Type 150 M: 0.90 mm Type 150 S: 0.94 mm Thickness tolerance: ± 0.02 mm	Type 175 M: 0.90 mm Type 175 SN: 0.94 mm Type 175 R: 0.98 mm Thickness tolerance: ± 0.02 mm

For more information please contact BFS Pressroom Solutions

t: 0118 930 5999 f: 0118 932 3335

sales@bfs-pressroomsolutions.co.uk / www.bfs-pressroomsolutions.co.uk / 5 Pincents Kiln Industrial Estate / Pincents Lane / Calcot/ Berkshire RG31 7SD

Leading the way in Specialist Printing Consumables