


Rollin™

UV-E

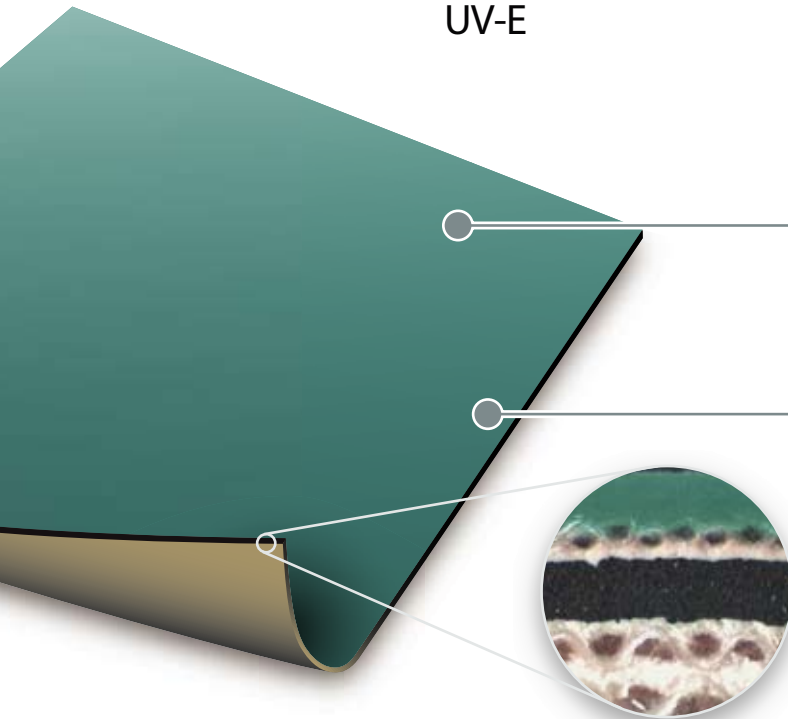

Applications:

Sheetfed, Coating, Packaging, Metal Decorating, Continuous Form & Plastic

UV Compatible Surface

Exclusively designed for UV applications, the EPDM blended rubber surface provides exceptional resistance to UV inks and washes.

Excellent Ink Transfer

The micro-buffed surface allows for superior print quality and release.

Durable Construction

Multi-ply fabric carcass is combined with the compressible layer for excellent smash resistance.

Technical Details

COLOR: Green

INK COMPATIBILITY: UV, EB

SURFACE: Buffed EPDM Rubber

HARDNESS: 78 Shore A

AVAILABLE THICKNESS: 1.71 mm ± 0.02 (3 Ply)
1.96 mm ± 0.02 (4 Ply)

BLANKET CONSTRUCTION: Compressible

For more information please contact BFS Pressroom Solutions

t: 0118 930 5999 f: 0118 932 3335

sales@bfs-pressroomsolutions.co.uk / www.bfs-pressroomsolutions.co.uk / 5 Pincents Kiln Industrial Estate / Pincents Lane / Calcot/ Berkshire RG31 7SD

Leading the way in Specialist Printing Consumables