


# Rollin™

Libix

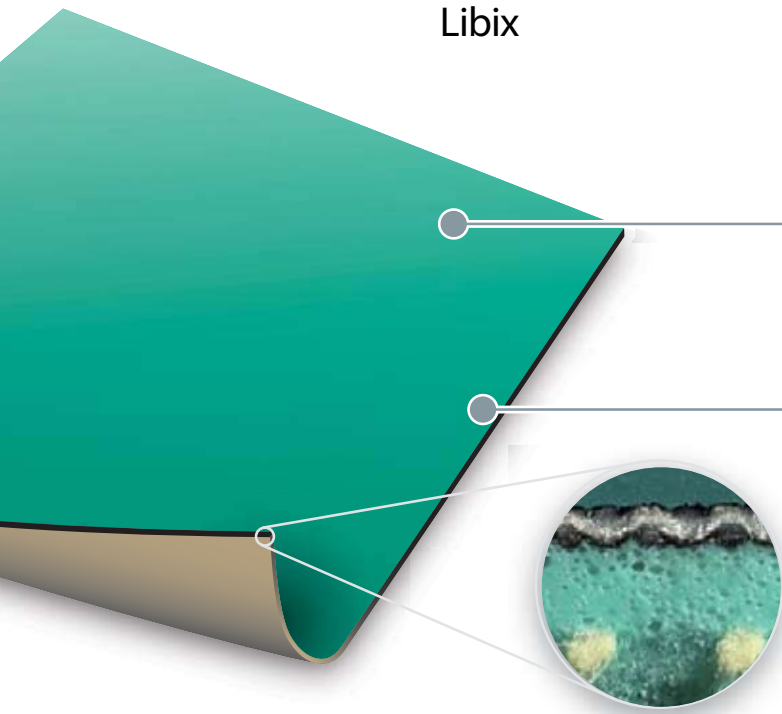

## Applications:

Sheetfed, Cardboard Printing, Good success in large format sheetfed.

## Low Solvent Top Surface

Top Surface chemically formulated to prevent solvent aggression.

## High resistance

High resistant top rubber surface with exceptional wear, release and ink transfer properties.

## Durable Construction

Robust polymer compressible layer engineered to provide exceptional smash absorption and recovery properties. Aramid fibres are used to ensure stability in the register on large format presses.

## Technical Details

COLOR:	Dark Green	INK COMPATIBILITY:	UV, Conventional
SURFACE :	Micro-ground and polished	HARDNESS :	83 Shore A
AVAILABLE THICKNESS :	1.96 mm ± 0.02 (4 Ply)	BLANKET CONSTRUCTION:	Compressible
ROUGHNESS :	< 1.8 µm		

For more information please contact BFS Pressroom Solutions

t: 0118 930 5999 f: 0118 932 3335

sales@bfs-pressroomsolutions.co.uk / www.bfs-pressroomsolutions.co.uk / 5 Pincent's Kiln Industrial Estate / Pincent's Lane / Calcot/ Berkshire RG31 7SD

**Leading the way in Specialist Printing Consumables**