


Rollin™

Graffity Plus

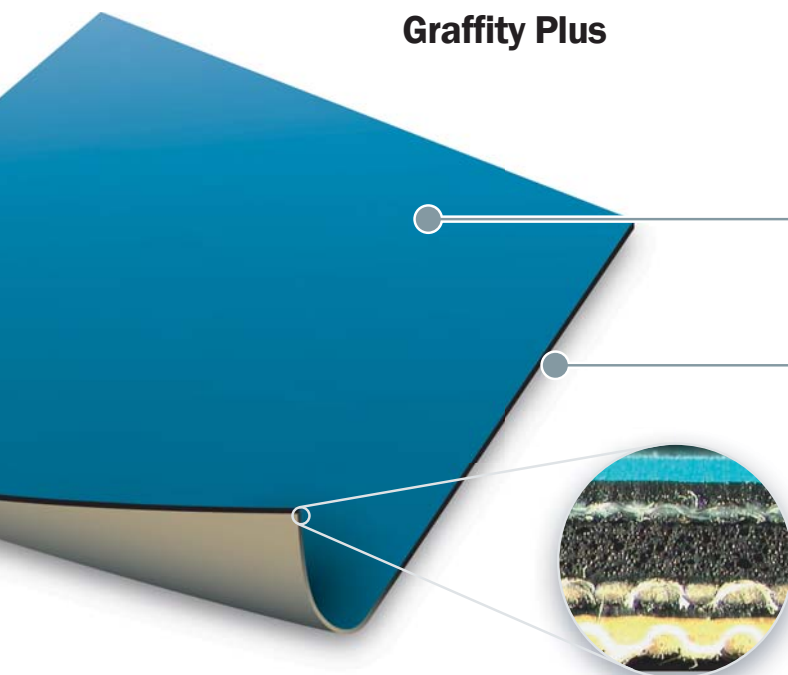

Applications:

Heatset and Newspaper.

Especially designed for web applications

Providing the well known Graffity print quality.

Excellent Dot Shape

Graffity has a buffed surface that is optimized to provide excellent dot shape and reduced gain on press.

Unique Surface Chemistry

Ensures good solids, reduced ink and paper build-up and a quick web release.

Technical Details

COLOR:	Blue	ROUGHNESS:	Ra 0,8 - 1,2 µm
SURFACE:	Microbuffered	BLANKET CONSTRUCTION:	Closed cell compressible layer
AVAILABLE THICKNESS:	1.71 mm ± 0.02 (3 Ply) 1.96 mm ± 0.02 (3 Ply)	MAXIMUM LINEAR EXPANSION:	0.9%
ROUGHNESS:	Ra 0.7 - 1.0 µm	MAXIMUM TENSILE FORCE (DIN 16621):	> 4500 N
FEED CHARACTERISTIC:	Positive	AVERAGE LOAD VALUE N/CM² @ 0,23 MM INDENTATION:	250

For more information please contact BFS Pressroom Solutions

t: 0118 930 5999 f: 0118 932 3335

sales@bfs-pressroomsolutions.co.uk / www.bfs-pressroomsolutions.co.uk / 5 Pincents Kiln Industrial Estate / Pincents Lane / Calcot/ Berkshire RG31 7SD

Leading the way in Specialist Printing Consumables